



PIN TERMINALS (TC TYPE)

ROUND PIN TYPE

Pin is in line with the center of the barrel.

RoHS

See page 2

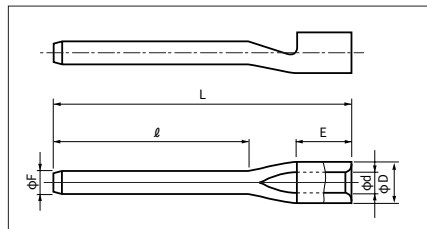
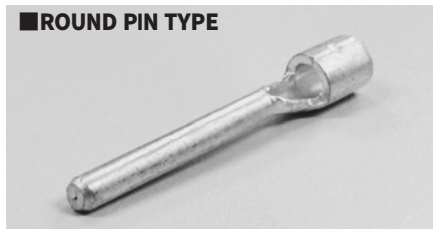


PART NUMBER	DIMENSIONS mm						WIRE RANGE			TOOL No.		STD QTY/BOX
	φF	l	L	E	φD	φd	SOLID mm	STRANDED mm ²	AWG	HAND TOOL No.	TOOL BODY No. DIES No.	
TC 1.25-11S-ST [HS]	1.5	11.0	19.5	4.5	3.4	1.7	0.57 1.44	0.25 1.65	22-16	NH 1 NH 61 NA 10 NA 3	N10 01 N3 7	1,000 (100×10)
TC 1.25-11V-ST [HS]	1.9	11.0	19.5									
TC 1.25-16V-ST [HS]	1.9	16.0	24.5									
TC 2-11V-ST [HS]	1.9	11.0	19.5	4.5	4.2	2.3	1.14 1.82	1.04 2.63	16-14	NH 1 NH 9 NH 61 NA 10 NA 3	N10 02 N3 7	1,000 (100×10)
TC 2-16V-ST [HS]	1.9	16.0	24.5									

ROUND PIN TYPE

RoHS

See page 2

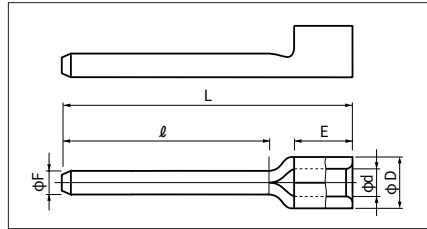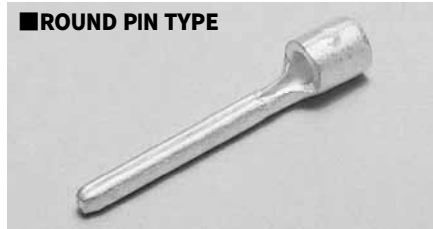

PART NUMBER	DIMENSIONS mm						WIRE RANGE			TOOL No.		STD QTY/BOX
	φF	l	L	E	φD	φd	SOLID mm	STRANDED mm ²	AWG	HAND TOOL No.	TOOL BODY No. DIES No.	
TC 0.3-9.5 [HS] ○	1.0	9.5	15.3	4.5	2.2	1.0	—	0.2~0.5 0.3~0.5 UL·CSA USE	24~20 22~20 UL·CSA USE	NH 60 NA 3 N3 70		1,000
TC 1.25-11 [HS] ○	1.9	11.0	17.5	4.5	3.4	1.7	0.57 1.44	0.25 1.65	22-16	NH 1 NH 61 NA 10 NA 3	N10 01 N3 7	1,000 (100×10)
TC 1.25-11S [HS] ○	1.5		17.5									
TC 1.25-16 [HS] ○	1.9		22.0									
TC 1.25-16S [HS] ○	1.5		22.0									
TC 1.25-20 [HS] ○	1.9		26.0									
TC 1.25-20S [HS] ○	1.5		26.0									
TC 2-11 [HS] ○	1.9	11.0	17.5	4.5	4.2	2.3	1.14 1.82	1.04 2.63	16-14	NH 1 NH 9 NH 61 NA 10 NA 3	N10 02 N3 7	1,000 (100×10)
TC 2-11S [HS] ○	1.5		17.5									
TC 2-16 [HS] ○	1.9		22.0									
TC 2-16S [HS] ○	1.5		22.0									
TC 2-20 [HS] ○	1.9		26.0									
TC 2-20S [HS] ○	1.5		26.0									
TC 3.5-11S [HS] ○	1.9	11.0	21.0	6.0	5.1	3.0	1.82 2.40	2.63 4.60	12	NH 1 NH 9 NA 10 NA 3	N10 03 N3 7	1,000 (100×10)
TC 5.5-11 [HS] ○	2.7	11.0	21.0	6.5	5.6	3.4	1.82 2.89	2.63 6.64	12-10	NH 1 NH 9 NA 10 NA 3	N10 03 N3 7	1,000 (100×10)



NOTE

- : UL, CSA [HS] : HS-terminal
- Refer to page-12 for UL/CSA and proper strip length of wire.

PIN TERMINAL WITH INSULATION CAP

■ Pin terminal & Insulation cap is packed in one clear plastic package.

■ ROUND PIN TYPE

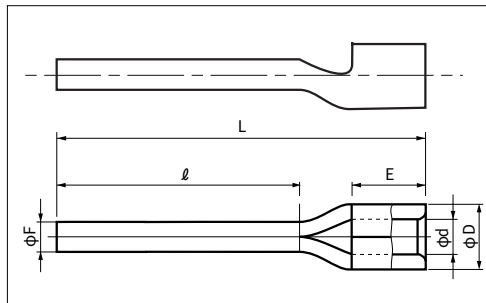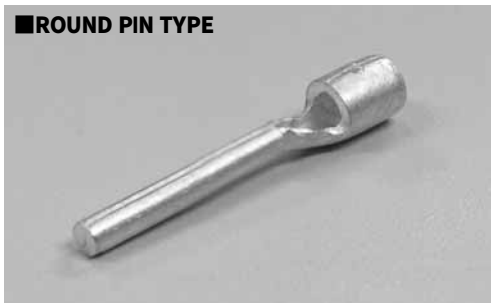

RoHS



See page 2

PART NUMBER	DIMENSIONS mm						WIRE RANGE		TOOL No.		COLOR	STD QTY/BOX
							STRANDED mm ²	AWG	HAND TOOL No.			
	ΦF	ℓ	L	E	ΦD	Φd			TOOL BODY No.	DIES No.		
TC 1.25-13.5V-ST-C 	1.9	13.5	22.0	4.5	3.4	1.7	0.25~1.65	22-16	NH 1 NH 61 NA 10 NA 3	N10 01 N3 7	Red Translucent	1000 (100×10)
TC 2-13.5V-ST-C 					4.2	2.3	1.04~2.63	16-14	NH 1 NH 61 NH 9 NA 10 NA 3	N10 02 N3 7	Blue Translucent	
TC 5.5-15ST-C 		15.0	26.5	6.5	5.6	3.4	2.63~6.64	12-10	NH 1 NH 9 NA 10 NA 3	N10 03 N3 7	Yellow Translucent	500 (50×10)
TC 5.5-21ST-C 		21.0	32.5									

RATED VOLTAGE / CURRENCY : TC 1.25-13.5V-ST-C TC 2-13.5V-ST-C [600V / 20A]
TC 5.5-15ST-C TC 5.5-21ST-C [600V / 37A]

MATERIAL OF CAP : VINYL UL94V-0

■ ROUND PIN TYPE

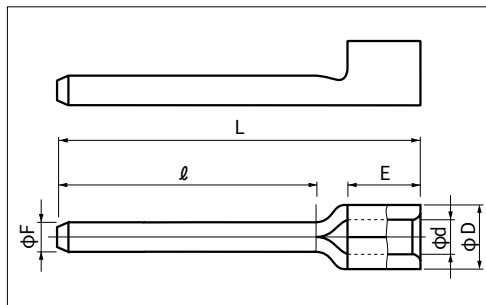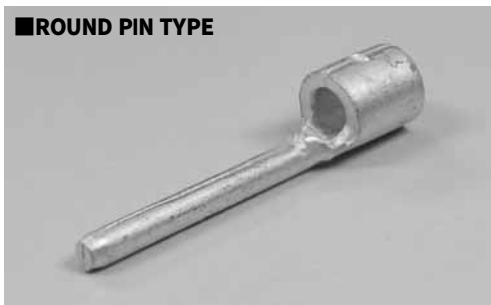

RoHS

See page 2



PART NUMBER	DIMENSIONS mm						WIRE RANGE		TOOL No.		COLOR	STD QTY/BOX
							STRANDED mm ²	AWG	HAND TOOL No.			
	ϕ F	ℓ	L	E	ϕ D	ϕ d			TOOL BODY No.	DIES No.		
TC 235-13.5V-ST-C HS	1.9	13.5	25.0	6.0	5.6	3.4	2.0~3.5	14-12	NH 1 NH 9		Yellow Translucent	500 (50×10)
									NA 10 NA 3	N10 03 N3 7		

RATED VOLTAGE / CURRENCY : 600V / 20A MATERIAL OF CAP : VINYL UL94V-0

PIN TERMINALS (TC TYPE)

A

■ SQUARE PIN TYPE
(P/N TC-8~TC-38)

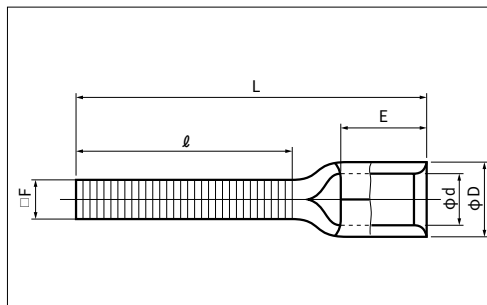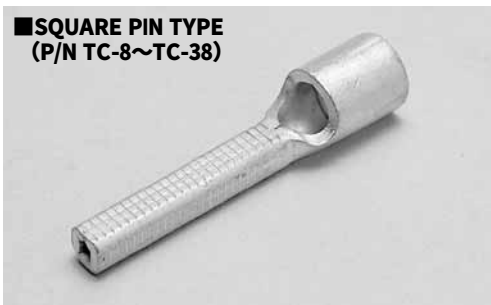

RoHS


See page 2

PART NUMBER	DIMENSIONS mm						WIRE RANGE			TOOL No.		STD QTY/BOX
							SOLID mm	STRANDED mm ²	AWG	HAND TOOL No.		
	□F	ℓ	L	E	φD	φd				TOOL BODY No.	DIES No.	
TC 8-S	3.5	20.0	33.5	8.4	7.1	3.5	1.82 2.89	2.63 6.64	12-10	NH 1,NH 9 NOP 60,NOM 60		100
TC 8						4.5	2.89 3.65	6.64 10.52	8	NA 20	N20 08	
TC 14S	3.5	25.0	40.5	10.0	9.0	5.8	—	10.52 16.78	6	NH 9,NOP 60 NOM 60,NOP 150H NOM 150		50
TC 14	4.5					—	16.78	6	NA 20	N20 14		
TC 22S	3.5	28.0	47.0	12.0	11.5	7.7	—	16.78 26.66	4	NOP 60 NOM 60 NOP 150H NOM 150		
TC 22	6.5					—	26.66	4				
TC 38	6.9	30.0	50.0	13.0	13.3	9.4	—	26.66 42.42	2	NA 20	N20 22	
TC 60	6.9	30.0	60.0	18.5	15.6	11.4	—	42.42 60.57	1/0		N20 38 N20 60	

NOTE

Suffix -C for a kit of pin terminals & VC caps.

■ VC CAP for non-insulated pin terminals

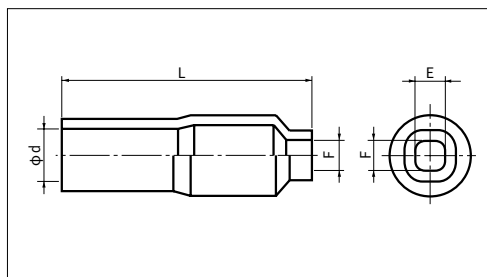

RoHS

See page 2

PART NUMBER	DIMENSIONS mm				APPLICABLE TERMINAL PART NUMBER	STD QTY/BAG
	φd	E	F	L		
VC 8	6.5	3.5	3.5	30.5	TC 8S TC 8	50
VC 14	8.5	4.5	4.5	37	TC 14S TC 14	
VC 22S	10	3.5	3.5	53	TC 22S	
VC 22	10	6.5	6.5	50	TC 22	
VC 38	12	6.9	6.9	58	TC 38	
VC 60	14.5	6.9	6.9	61	TC 60	

● MATERIAL : P.V.C.

● RATED VOLTAGE : 600V

[NOTE] Do not apply EPM/EPDM-insulated wire.

● COLOR : Transparent

● MAX. TEMPERATURE : 60°C