


Đầu cose không cách điện

NON-INSULATED RING TERMINALS

> Maximum electric current:

A.W.G.	400	500	600
AMP.	545	620	690

> Terminal material: COPPER

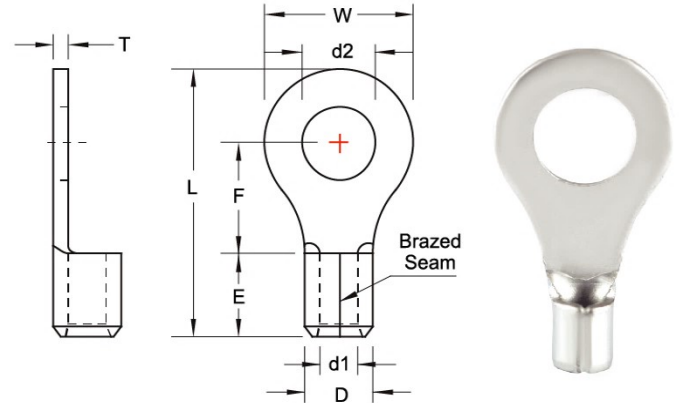

E 96029



E 96029

Wire Range A.W.G.	Item No.	Stud Size		Dimension							Packing
mm ²	Braze Seam	d2		W	F	L	E	D	d1	T	pcs/bag
400/500 A.W.G. 200 mm ²	RNB200-12	1/2	13.0	44.0	24.5	72.0	31.5	32.6	24.0	4.0	100
	RNB200-16	5/8	17.0	44.0	24.5	72.0	31.5	32.6	24.0	4.0	100
	RNB200-20	3/4	21.0	44.0	37.5	91.0	31.5	32.6	24.0	4.0	100
	RNB200-24	15/16	25.0	44.0	37.5	91.0	31.5	32.6	24.0	4.0	100
400/500 A.W.G. 200 mm ²	RNB250-12	1/2	13.0	44.0	24.5	72.0	31.5	32.7	24.0	4.0	100
	RNB250-16	5/8	17.0	44.0	24.5	72.0	31.5	32.7	24.0	4.0	100
500/600 A.W.G. 325 mm ²	RNB325-12	1/2	13.0	50.5	33.5	88.0	35.5	37.6	28.0	4.3	100
	RNB325-16	5/8	17.0	50.5	33.5	88.0	35.5	37.6	28.0	4.3	100
	RNB325-20	3/4	21.0	50.5	45.0	105.7	35.5	37.6	28.0	4.3	100
	RNB325-24	15/16	25.0	50.5	45.0	105.7	35.5	37.6	28.0	4.3	100

Crimping Tools

9H-2, 9H-150

IZUMI MODEL
with die index
No.: 80 / 100 / 150

12K-1

IZUMI MODEL
with die index
No.: 180 / 200 / 325

12#A

IZUMI MODEL
with die index
No.: 150 / 180 / 200 / 325

KH-150

K.S.MODEL
with die index
No.: 95 / 120

KSTP-150D

K.S.MODEL
with die index
No.: 150 / 180

KSTP-325

K.S.MODEL
with die index
No.: 240 / 400



Đầu cose không cách điện

NON-INSULATED RING TERMINALS

> Maximum electric current:

A.W.G.	22	20	18	16	14	12
AMP.	9	12	17	18	30	35

> Terminal material: COPPER

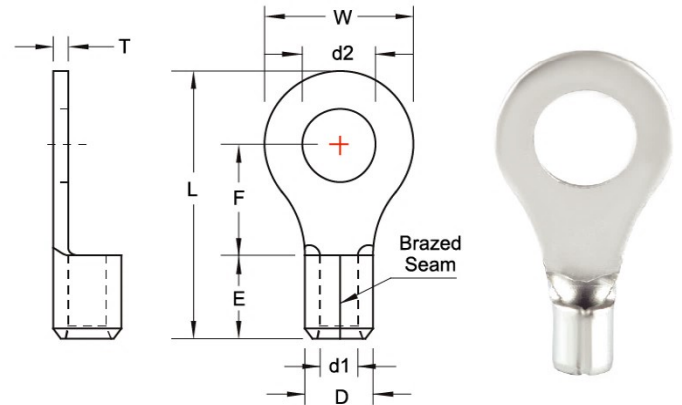

Wire Range A.W.G.	Item No.	Stud Size		Dimension							Packing
mm ²	Brazed Seam	d2		W	F	L	E	D	d1	T	pcs/bag
22-16 A.W.G. 0.5-1.5 mm ²	RNBL1-3.7 *	#6	3.7	8.0	7.0	15.8	4.8	3.4	1.7	0.75	100
	RNBL1-4 *	#8	4.3	8.0	7.0	15.8	4.8	3.4	1.7	0.75	100
	RNB1-5 *	#10	5.3	8.0	7.0	15.8	4.8	3.4	1.7	0.75	100
	RNB1-6 *	1/4	6.4	11.6	11.0	21.8	4.8	3.4	1.7	0.75	100
	RNB1-8 *	5/16	8.4	11.6	11.0	21.8	4.8	3.4	1.7	0.75	100
	RNB1-10 *	3/8	10.5	13.6	13.9	25.5	4.8	3.4	1.7	0.75	100
	RNB1-12	1/2	13.0	19.2	16.0	30.4	4.8	3.4	1.7	0.75	100
16-14 A.W.G. 1.5-2.5 mm ²	RNBL2-3.7 *	#6	3.7	8.5	7.4	16.5	4.8	4.1	2.3	0.8	100
	RNBL2-4 *	#8	4.3	8.5	7.4	16.5	4.8	4.1	2.3	0.8	100
	RNBL2-5 *	#10	5.3	9.5	7.4	17.0	4.8	4.1	2.3	0.8	100
	RNB2-6 *	1/4	6.4	12.0	11.0	21.8	4.8	4.1	2.3	0.8	100
	RNB2-8 *	5/16	8.4	12.0	11.0	21.8	4.8	4.1	2.3	0.8	100
	RNB2-10 *	3/8	10.5	13.6	13.9	25.5	4.8	4.1	2.3	0.8	100
	RNB2-12	1/2	13.0	19.2	16.0	30.4	4.8	4.1	2.3	0.8	100
14-12 A.W.G. 2.5-4 mm ²	RNB3-4	#8	4.3	8.0	8.0	18.0	6.0	5.1	2.9	1.0	100
	RNBS3-5	#10	5.3	8.0	8.0	18.0	6.0	5.1	2.9	1.0	100
	RNB3-6	1/4	6.4	12.0	9.4	21.4	6.0	5.1	2.9	1.0	100

* : Additional  certified


Đầu cose không cách điện

NON-INSULATED RING TERMINALS

> Maximum electric current:

A.W.G.	14	12	10	8
AMP.	30	35	50	70

> Terminal material: COPPER

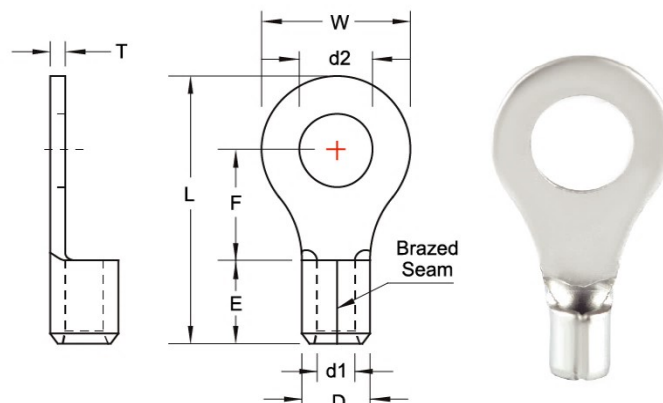

E 96029



E 96029

Wire Range A.W.G.	Item No.	Stud Size		Dimension							Packing
mm ²	Braze Seam	d2		W	F	L	E	D	d1	T	pcs/bag
14-12 A.W.G. 2.5-4 mm ²	RNB3-8	5/16	8.4	15.0	13.3	27.0	6.0	5.1	2.9	1.0	100
	RNB3-10	3/8	10.5	15.0	13.3	27.0	6.0	5.1	2.9	1.0	100
	RNB3-12	1/2	13.0	19.2	16.0	31.6	6.0	5.1	2.9	1.0	100
12-10 A.W.G. 4-6 mm ²	RNBL5-4 *	#8	4.3	9.5	8.3	19.0	6.0	5.6	3.4	1.0	100
	RNB5-5 *	#10	5.3	9.5	8.3	19.0	6.0	5.6	3.4	1.0	100
	RNB5-6 *	1/4	6.4	12.0	10.5	22.5	6.0	5.6	3.4	1.0	100
	RNB5-8 *	5/16	8.4	15.0	13.3	27.0	6.0	5.6	3.4	1.0	100
	RNB5-10 *	3/8	10.5	15.0	13.3	27.0	6.0	5.6	3.4	1.0	100
	RNB5-12 *	1/2	13.0	19.2	16.0	31.6	6.0	5.6	3.4	1.0	100
8 A.W.G. 8 mm ²	RNBS8-6	1/4	6.4	12.0	9.3	23.3	8.5	7.2	4.5	1.2	100
	RNB8-8 *	5/16	8.4	15.0	13.6	29.2	8.5	7.2	4.5	1.2	100
	RNB8-10 *	3/8	10.5	15.0	13.6	29.2	8.5	7.2	4.5	1.2	100
	RNB8-12	1/2	13.0	20.0	15.0	33.5	8.5	7.2	4.5	1.2	100
	RNB8-14	9/16	15.0	31.6	25.6	49.5	8.5	7.2	4.5	1.2	100
	RNB8-16	5/8	17.0	31.6	25.6	49.5	8.5	7.2	4.5	1.2	100

* : Additional  certified

Crimping Tools

5N18

IZUMI MODEL
with die index
No.: 1.25 / 2 / 5.5 / 8



KST2000D-1322

K.S.MODEL
with die index
No.: 22-18 / 16-14 / 12-10 / 8

KM-70L

K.S.MODEL with die set No: DIE-1322
with die index
No.: 22-18 / 16-14 / 12-10 / 8


Đầu cose không cách điện

NON-INSULATED RING TERMINALS

> Maximum electric current:

A.W.G.	6	4	2
AMP.	95	125	170

> Terminal material: COPPER

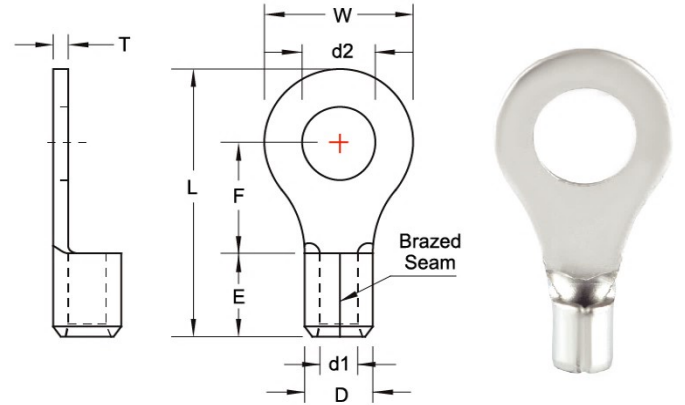

Wire Range A.W.G.	Item No.	Stud Size		Dimension							Packing
mm ²	Braze Seam	d2		W	F	L	E	D	d1	T	pcs/bag
6 A.W.G. 14 mm ²	RNBS14-6 *	1/4	6.4	12.0	13.3	29.2	10.5	9.0	5.8	1.5	100
	RNB14-8 *	5/16	8.4	16.0	14.2	32.5	10.5	9.0	5.8	1.5	100
	RNB14-10 *	3/8	10.5	16.0	14.2	32.5	10.5	9.0	5.8	1.5	100
	RNB14-12	1/2	13.0	22.0	19.8	41.0	10.5	9.0	5.8	1.5	100
	RNB14-14	9/16	15.0	31.6	25.3	51.0	10.5	9.0	5.8	1.5	100
	RNB14-16	5/8	17.0	31.6	25.3	51.0	10.5	9.0	5.8	1.5	100
4 A.W.G. 22 mm ²	RNBL22-6	1/4	6.4	16.5	13.5	33.5	12.0	11.5	7.7	1.7	100
	RNB22-8 *	5/16	8.4	16.5	13.5	33.5	12.0	11.5	7.7	1.7	100
	RNB22-10	3/8	10.5	16.5	13.5	33.5	12.0	11.5	7.7	1.7	100
	RNBL22-10	3/8	10.5	17.5	16.0	36.7	12.0	11.5	7.7	1.7	100
	RNB22-11	7/16	11.5	22.0	19.7	42.5	12.0	11.5	7.7	1.7	100
	RNB22-12	1/2	13.0	22.0	19.7	42.5	12.0	11.5	7.7	1.7	100
	RNB22-14	9/16	15.0	22.0	19.7	42.5	12.0	11.5	7.7	1.7	100
2 A.W.G. 38 mm ²	RNBL38-6	1/4	6.4	22.0	17.7	42.7	14.0	13.3	9.4	1.8	100
	RNBL38-8	5/16	8.4	22.0	17.7	42.7	14.0	13.3	9.4	1.8	100
	RNBL38-10	3/8	10.5	22.0	17.7	42.7	14.0	13.3	9.4	1.8	100
	RNB38-12 *	1/2	13.0	22.0	17.7	42.7	14.0	13.3	9.4	1.8	100

* : Additional  certified


Đầu cose không cách điện

NON-INSULATED RING TERMINALS

> Maximum electric current:

A.W.G.	2	1/0	2/0
AMP.	170	230	265

> Terminal material: COPPER

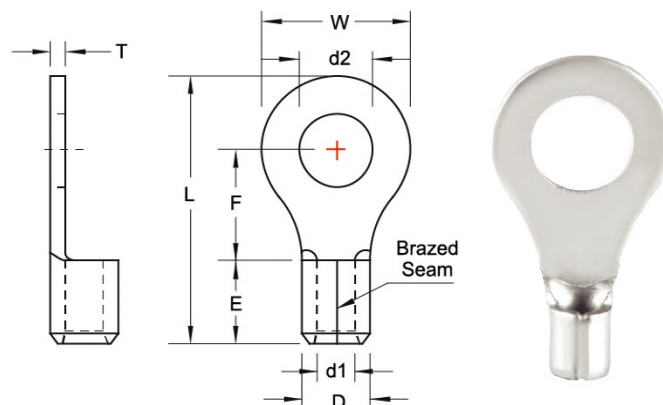

E 96029



E 96029

Wire Range A.W.G.	Item No.	Stud Size		Dimension							Packing
mm ²	Brazed Seam	d2		W	F	L	E	D	d1	T	pcs/bag
2 A.W.G. 38 mm ²	RNB38-14	9/16	15.0	30.0	23.3	52.0	14.0	13.3	9.4	1.8	100
	RNB38-16	5/8	17.0	30.0	23.3	52.0	14.0	13.3	9.4	1.8	100
1/0 A.W.G. 60 mm ²	RNB60-6	1/4	6.4	22.0	20.7	49.7	18.0	15.4	11.4	1.8	100
	RNB60-8	5/16	8.4	22.0	20.7	49.7	18.0	15.4	11.4	1.8	100
	RNB60-10	3/8	10.5	22.0	20.7	49.7	18.0	15.4	11.4	1.8	100
	RNB60-12	1/2	13.0	22.0	20.7	49.7	18.0	15.4	11.4	1.8	100
	RNB60-14	9/16	15.0	32.0	23.5	57.5	18.0	15.4	11.4	1.8	100
	RNB60-16	5/8	17.0	32.0	23.5	57.5	18.0	15.4	11.4	1.8	100
2/0 A.W.G. 70 mm ²	RNB70-6	1/4	6.4	24.0	20.0	50.0	18.0	17.5	13.3	2.0	100
	RNB70-8	5/16	8.4	24.0	20.0	50.0	18.0	17.5	13.3	2.0	100
	RNB70-10	3/8	10.5	24.0	20.0	50.0	18.0	17.5	13.3	2.0	100
	RNB70-12	1/2	13.0	24.0	20.0	50.0	18.0	17.5	13.3	2.0	100
	RNB70-14	9/16	15.0	32.0	26.0	61.0	18.0	17.5	13.3	2.0	100
	RNB70-16	5/8	17.0	32.0	26.0	61.0	18.0	17.5	13.3	2.0	100

9H-60 (EP-38)
IZUMI MODEL
with die index
No.: 14 / 22 / 38

9H-2, 9H-150, 12#A
IZUMI MODEL
with die index
No.: 60 / 70



LY-2045B, LY-2045D
K.S.MODEL
with die index
No.: 14

LY-2045E
K.S.MODEL
with die index
No.: 22 or 25

KH-120
K.S.MODEL
with die index
No.: 22 or 25 / 35 /
50 / 70


Đầu cose không cách điện

NON-INSULATED RING TERMINALS

> Maximum electric current:

A.W.G.	3/0	4/0	250	300	350
AMP.	310	360	405	445	505

> Terminal material: COPPER

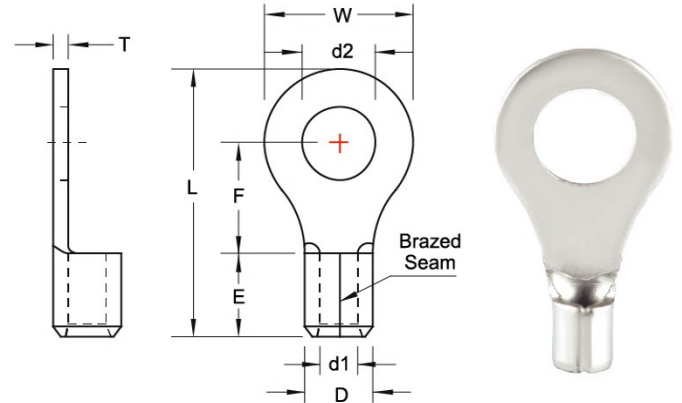

E 96029



E 96029

Wire Range A.W.G.	Item No.	Stud Size		Dimension							Packing
mm ²	Brazed Seam	d2		W	F	L	E	D	d1	T	pcs/bag
3/0 A.W.G. 80 mm ²	RNB80-8	5/16	8.4	27.0	20.7	54.2	20.0	19.5	14.5	2.3	100
	RNB80-10	3/8	10.5	27.0	20.7	54.2	20.0	19.5	14.5	2.3	100
	RNB80-12	1/2	13.0	27.0	20.7	54.2	20.0	19.5	14.7	2.3	100
	RNB80-16	5/8	17.0	32.0	32.0	68.0	20.0	19.5	14.7	2.3	100
4/0 A.W.G. 360 mm ²	RNB100-8	5/16	8.4	28.5	20.4	55.6	21.0	22.1	16.4	2.7	100
	RNB100-10	3/8	10.5	28.5	20.4	55.6	21.0	22.1	16.4	2.7	100
	RNB100-12	1/2	13.0	28.5	20.4	55.6	21.0	22.1	16.4	2.7	100
	RNB100-16	5/8	17.0	32.0	32.0	69.0	21.0	22.1	16.4	2.7	100
250/300 A.W.G. 150 mm ²	RNB150-10	3/8	10.5	36.0	23.0	66.0	27.0	26.6	19.5	3.2	100
	RNB150-12	1/2	13.0	36.0	23.0	66.0	27.0	26.6	19.5	3.2	100
	RNB150-16	5/8	17.0	36.0	23.0	66.0	27.0	26.6	19.5	3.2	100
	RNB150-20	3/4	21.0	36.0	36.0	81.0	27.0	26.6	19.5	3.2	100
	RNB150-22	7/8	23.0	36.0	36.0	81.0	27.0	26.6	19.5	3.2	100
	RNB150-24	15/16	25.0	36.0	36.0	81.0	27.0	26.6	19.5	3.2	100
300/350 A.W.G. 180 mm ²	RNB180-12	1/2	13.0	38.5	24.5	69.0	28.5	28.6	21.0	3.5	100
	RNB180-16	5/8	17.0	38.5	24.5	69.0	28.5	28.6	21.0	3.5	100
	RNB180-20	3/4	21.0	38.5	39.0	86.6	28.5	28.6	21.0	3.5	100
	RNB180-24	15/16	25.0	38.5	39.0	86.6	28.5	28.6	21.0	3.5	100