


Pin Chốt dẫn điện- không bọc cách điện

NON-INSULATED PIN TERMINALS

> Maximum electric current:

A.W.G.	1/0	2/0	3/0
AMP.	230	265	310

> Terminal material: COPPER

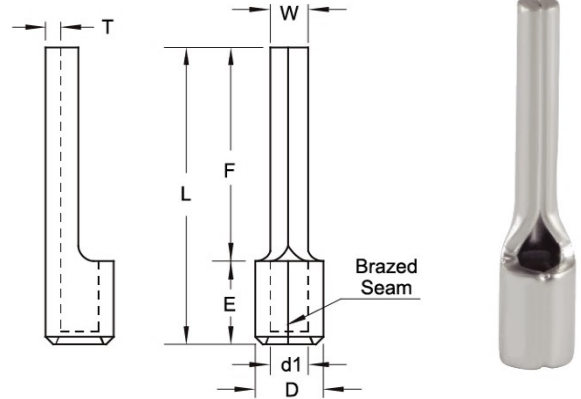

E 96029



E 96029

Wire Range A.W.G.	Item No.	Dimension							Packing
mm ²	Brazed Seam	W	F	L	E	D	d1	T	pcs/bag
1/0 A.W.G. 50 mm ²	PTNB50-20 ☉	9.5	26.0	45.0	19.0	13.6	9.6	1.8	100
2/0 A.W.G. 70 mm ²	PTNB70-25 ☉	11.0	31.0	55.0	24.0	15.8	11.4	2.0	100
3/0 A.W.G. 95 mm ²	PTNB95-25 ☉	12.5	31.0	55.0	24.0	18.9	13.5	2.5	100

☉ : Not UL and C-UL listed

Crimping Tools

5N18

IZUMI MODEL
with die index
No.: 1.25 / 2 / 5.5 / 8

9H-60

IZUMI MODEL
with die index
No.: 14



KST2000D-1322

K.S.MODEL
with die index
No.: 1.25 / 2 / 5.5 / 8

LY-2045E

K.S.MODEL
with die index
No.: 25

KH-120

K.S.MODEL
with die index
No.: 35 / 50 / 70 / 95


Đầu cose Lưỡi dẫn điện- không bọc cách điện

NON-INSULATED BLADE TERMINALS

> Maximum electric current:

A.W.G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

> Terminal material: COPPER

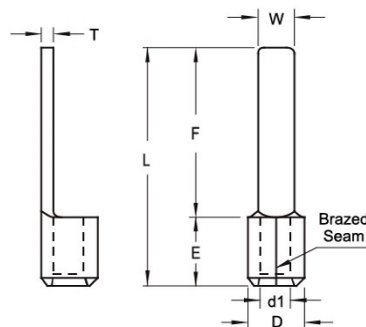

E 96029



E 96029

Wire Range A.W.G.	Item No.	Dimension							Packing
mm ²	Brazed Seam	W	F	L	E	D	d1	T	pcs/bag
22-16 A.W.G. 0.5-1.5 mm ²	DBNB1-10	2.3	10.0	14.8	4.8	3.4	1.7	0.75	100
	DBNB1-11	3.0	11.0	15.8	4.8	3.4	1.7	0.75	100
	DBNB1-18	2.2	18.0	22.8	4.8	3.4	1.7	0.75	100
16-14 A.W.G. 1.5-2.5 mm ²	DBNB2-10	2.4	10.0	14.8	4.8	4.1	2.3	0.8	100
	DBNB2-13	2.4	13.0	17.8	4.8	4.1	2.3	0.8	100
	DBNB2-18	2.2	18.0	22.8	4.8	4.1	2.3	0.8	100
12-10 A.W.G. 4-6 mm ²	DBNB5-10	2.8	10.0	16.0	6.0	5.6	3.4	1.0	100
	DBNB5-14	4.5	14.0	20.0	6.0	5.6	3.4	1.0	100
	DBNB5-18	4.5	18.0	24.0	6.0	5.6	3.4	1.0	100

Crimping Tools

5N18
IZUMI MODEL
with die index
No.: 1.25 / 2 / 5.5



KST2000D-1322
K.S.MODEL
with die index
No.: 22-18 / 16-14 / 5.5

KM-70L
K.S.MODEL
with die index
No.: 22-18 / 16-14

LY-2045A
K.S.MODEL
with die index
No.: 5.5


Pin Chốt dẫn điện- không bọc cách điện

NON-INSULATED PIN TERMINALS

> Maximum electric current:

A.W.G.	22	20	18	16	14	12
AMP.	9	12	17	18	30	35
A.W.G.	10	8	6	4	2	
AMP.	50	70	95	125	170	

> Terminal material: COPPER

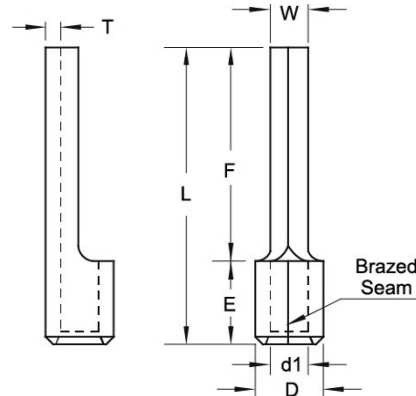

E 96029



E 96029

Wire Range A.W.G.	Item No.	Dimension							Packing
mm ²	Brazed Seam	W	F	L	E	D	d1	T	pcs/bag
22-16 A.W.G. 0.5-1.5 mm ²	PTNB1-10	1.9	10.0	14.8	4.8	3.4	1.7	0.75	100
	PTNB1-12	1.9	12.0	16.8	4.8	3.4	1.7	0.75	100
	PTNB1-14	1.9	14.0	18.8	4.8	3.4	1.7	0.75	100
16-14 A.W.G. 1.5-2.5 mm ²	PTNB2-10	1.9	10.0	14.8	4.8	4.1	2.3	0.8	100
	PTNB2-12	1.9	12.0	16.8	4.8	4.1	2.3	0.8	100
	PTNB2-16	1.9	16.0	21.0	4.8	4.1	2.3	0.8	100
12-10 A.W.G. 4-6 mm ²	PTNB5-10	2.8	10.0	17.0	6.0	5.6	3.4	1.0	100
	PTNB5-13	2.8	14.0	20.0	6.0	5.6	3.4	1.0	100
8 A.W.G. 10 mm ²	PTNB10-12	4.3	14.0	22.0	8.0	6.9	4.5	1.1	100
6 A.W.G. 16 mm ²	PTNB16-13	5.3	16.0	26.0	10.0	8.4	5.8	1.2	100
4 A.W.G. 25 mm ²	PTNB25-15 ☉	6.8	20.0	33.5	13.5	9.5	7.0	1.2	100
2 A.W.G. 35 mm ²	PTNB35-20 ☉	8.0	24.5	40.5	16.0	11.8	8.4	1.5	100

☉ : Not UL and C-UL listed