


Đầu cáp đôi dẫn điện

NON-INSULATED TWIN CORD END TERMINALS

> Maximum electric current:

A.W.G.	8	6
AMP.	70	95

> Terminal material: COPPER TUBE. (TIN PLATED)

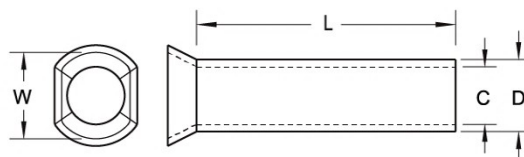

E 96029



E 96029

Wire Range A.W.G.	Item No.	Dimension				Packing
mm ²		L	D	C	W	pcs/bag
2 x 8 A.W.G. 2 x 10 mm ²	TEN10-14	14.0	6.9	6.5	7.4	100
2 x 6 A.W.G. 2 x 16 mm ²	TEN16-14	14.0	8.7	8.3	10.0	100

Crimping Tools

VARIOCRIMP 4
WACO MODEL



LY8-060
K.S.MODEL
with die index
No.: 0.25-0.75 / 1-1.5 / 2.5 / 4 / 6



KST2000M
K.S.MODEL
with die index
No.: 6 / 10 / 16

VARIOCRIMP 16
WACO MODEL



KST2000L
K.S.MODEL
with die index
No.: 0.5 / 0.75 / 1 / 1.5 / 2.5 / 4

DIN 46228


Đầu cáp DIN 46228 không cách điện

NON-INSULATED CORD END TERMINALS

> Maximum electric current:

A.W.G.	26	24	22	20	18	16
AMP.	5.5	7	9	12	17	18

> Terminal material: COPPER TUBE. (TIN PLATED)

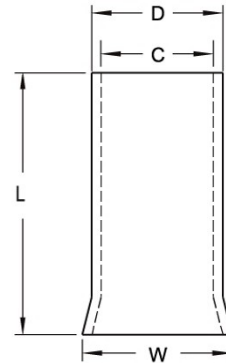

E 96029



E 96029

Wire Range A.W.G.	Item No.	Dimension				Packing
mm ²		L	D	C	W	pcs/bag
26 A.W.G. 0.25 mm ²	EN0206	6.0	1.1	0.8	1.5	100
	EN0208	8.0	1.1	0.8	1.5	100
24 A.W.G. 0.34 mm ²	EN0306	6.0	1.1	0.8	1.5	100
	EN0308	8.0	1.1	0.8	1.5	100
20 A.W.G. 0.75 mm ²	EN7506	6.0	1.5	1.2	1.9	100
	EN7508	8.0	1.5	1.2	1.9	100
	EN7510	10.0	1.5	1.2	1.9	100
	EN7512	12.0	1.5	1.2	1.9	100
18 A.W.G. 1.0 mm ²	EN1006	6.0	1.7	1.4	2.2	100
	EN1008	8.0	1.7	1.4	2.2	100
	EN1010	10.0	1.7	1.4	2.2	100
	EN1012	12.0	1.7	1.4	2.2	100
16 A.W.G. 1.5 mm ²	EN1508	8.0	2.0	1.7	2.5	100
	EN1510	10.0	2.0	1.7	2.5	100
	EN1512	12.0	2.0	1.7	2.5	100

DIN 46228


Đầu cáp DIN 46228 không cách điện

NON-INSULATED CORD END TERMINALS

> Maximum electric current:

A.W.G.	10	8	6	4	2	1/0
AMP.	50	70	95	125	170	230

> Terminal material: COPPER TUBE. (TIN PLATED)

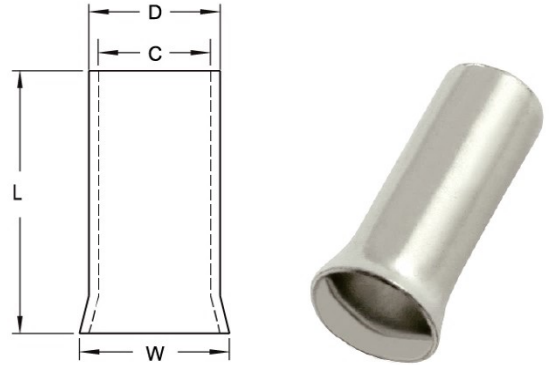

E 96029



E 96029

Wire Range A.W.G.	Item No.	Dimension				Packing
mm ²		L	D	C	W	pcs/bag
10 A.W.G. 6 mm ²	EN6012	12.0	3.9	3.5	4.7	100
	EN6018	18.0	3.9	3.5	4.7	100
8 A.W.G. 10 mm ²	EN10-12	12.0	4.9	4.5	5.8	100
	EN10-18	18.0	4.9	4.5	5.8	100
6 A.W.G. 16 mm ²	EN16-12	12.0	6.2	5.8	7.2	100
	EN16-18	18.0	6.2	5.8	7.2	100
4 A.W.G. 25 mm ²	EN25-16	16.0	7.9	7.5	9.1	100
	EN25-22	22.0	7.9	7.5	9.1	100
2 A.W.G. 35 mm ²	EN35-16	16.0	8.7	8.3	10.2	100
	EN35-25	25.0	8.7	8.3	10.2	100
1/0 A.W.G. 50 mm ²	EN50-25	25.0	10.9	10.3	12.7	100

DIN 46228


Đầu cáp DIN 46228 không cách điện

NON-INSULATED CORD END TERMINALS

> Maximum electric current:

A.W.G.	2/0	3/0	4/0	250	300	350
AMP.	265	310	360	405	445	505

> Terminal material: COPPER TUBE. (TIN PLATED)

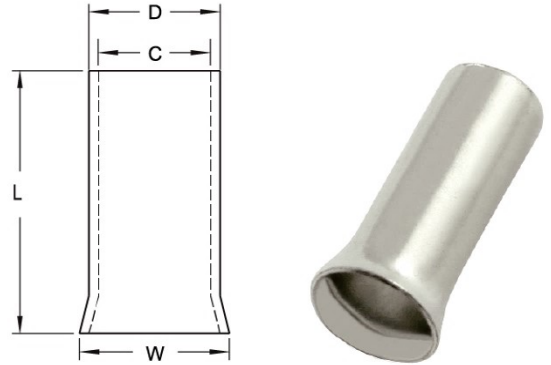

Wire Range A.W.G.	Item No.	Dimension				Packing
mm ²		L	D	C	W	pcs/bag
2/0 A.W.G. 70 mm ²	EN70-22	22.0	14.3	13.5	15.8	100
	EN70-25	25.0	14.3	13.5	15.8	100
3/0 A.W.G. 95 mm ²	EN95-25	25.0	15.6	14.8	17.3	100
	EN95-32	32.0	15.6	14.8	17.3	100
4/0 A.W.G. 120 mm ²	EN120-30	30.0	17.7	16.7	20.2	100
	EN120-32	32.0	17.7	16.7	20.2	100
	EN120-34	34.0	17.7	16.7	20.2	100
250/300 A.W.G. 150 mm ²	EN150-32	32.0	20.6	19.6	23.0	100
	EN150-38	38.0	20.6	19.6	23.0	100
300/350 A.W.G. 185 mm ²	EN185-32	32.0	21.4	20.2	23.9	100
	EN185-40	40.0	21.4	20.2	23.9	100

Crimping Tools

KSTP325-B

K.S.MODEL

with die index

No.: KC-25 / KC-35 / KC-50 / KC-70 / KC-95 / KC-120 / KC-150 / KC-185




Đầu cáp đôi dẫn điện

NON-INSULATED TWIN CORD END TERMINALS

> Maximum electric current:

A.W.G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

> Terminal material: COPPER TUBE. (TIN PLATED)

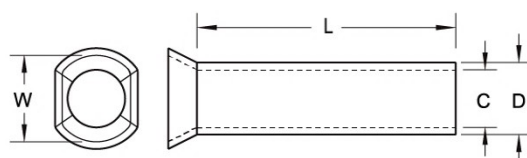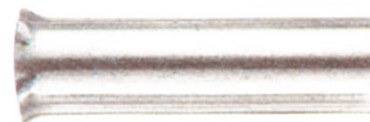

Wire Range A.W.G.	Item No.	Dimension				Packing
mm ²		L	D	C	W	pcs/bag
2 x 22 A.W.G. 2 x 0.5 mm ²	TEN0508	8.0	1.8	1.5	1.7	100
2 x 20 A.W.G. 2 x 0.75 mm ²	TEN7508	8.0	2.1	1.8	1.9	100
2 x 18 A.W.G. 2 x 1.0 mm ²	TEN1008	8.0	2.4	2.1	2.5	100
2 x 16 A.W.G. 2 x 1.5 mm ²	TEN15-12	12.0	2.6	2.3	2.8	100
2 x 14 A.W.G. 2 x 2.5 mm ²	TEN25-13	13.0	3.3	2.9	3.4	100
2 x 12 A.W.G. 2 x 4 mm ²	TEN4012	12.0	4.2	3.8	4.4	100
2 x 10 A.W.G. 2 x 6 mm ²	TEN6014	14.0	5.3	4.9	5.8	100