



Cực gắn dây dạng ống dẫn điện

NON-INSULATED COPPER TUBULAR LUGS (TL SERIES)

> Maximum electric current:

A.W.G.	250	300	350	400	500
AMP.	405	445	505	545	620

> Terminal material: COPPER

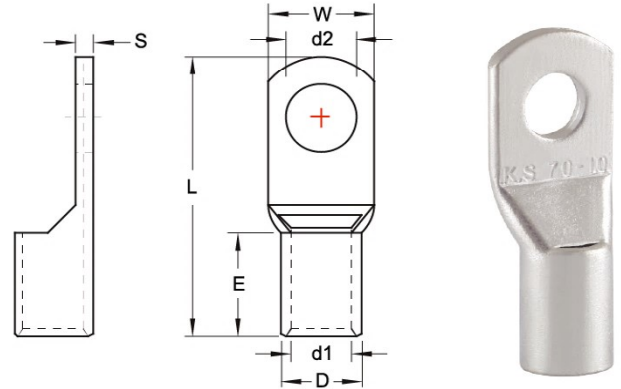

Wire Range A.W.G.	Item No.	Stud Size		Dimension						Packing
			d2	W	d1	D	L	E	S	
250/300 A.W.G. 150 mm ²	TL150-12	1/2	13.0	31.0	17.0	21.7	74.5	29.5	4.7	100
	TL150-14	9/16	15.0	31.0	17.0	21.7	74.5	29.5	4.7	100
	TL150-16	5/8	17.0	31.0	17.0	21.7	74.5	29.5	4.7	100
300/350 A.W.G. 185 mm ²	TL185-12	1/2	13.0	34.2	19.0	24.0	81.4	32.5	5.0	100
	TL185-16	5/8	17.0	34.2	19.0	24.0	81.4	32.5	5.0	100
400 A.W.G. 240 mm ²	TL240-14	9/16	15.0	39.0	21.5	27.0	94.0	35.5	5.5	100
	TL240-16	5/8	17.0	39.0	21.5	27.0	94.0	35.5	5.5	100
500 A.W.G. 300 mm ²	TL300-14	9/16	15.0	44.0	24.5	31.0	103.2	42.0	6.5	100
	TL300-16	5/8	17.0	44.0	24.5	31.0	103.2	42.0	6.5	100
	TL300-18	11/16	19.0	44.0	24.5	31.0	103.2	42.0	6.5	100

Crimping Tools

KSTHX-150B
K.S.MODEL
with die index
No.: 150

KSTP-240
K.S.MODEL
with die index
No.: 185 / 240

HPM 400
NOVOPRESS MODEL
with die index
No.: 150 / 185 / 240 / 300



Cực gắn dây dạng ống dẫn điện

NON-INSULATED COPPER TUBULAR LUGS (TL SERIES)

> Maximum electric current:

A.W.G.	8	6	4	2	1/0	2/0
AMP.	70	95	125	170	230	265

> Terminal material: COPPER

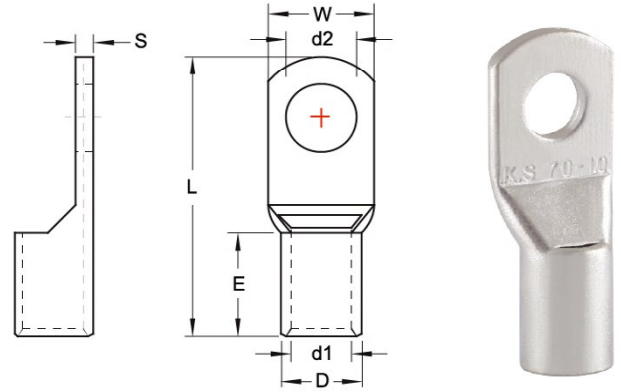

Wire Range A.W.G.	Item No.	Stud Size	Dimension							Packing
			mm ²	d2	W	d1	D	L	E	
8 A.W.G. 10 mm ²	TL10-6	1/4 6.5	12.6	4.5	6.2	27.0	10.0	1.1	100	
	TL10-8	5/16 8.4	12.6	4.5	6.2	27.0	10.0	1.1	100	
6 A.W.G. 16 mm ²	TL16-6	1/4 6.5	12.6	5.5	7.2	29.5	10.5	1.3	100	
	TL16-8	5/16 8.4	12.6	5.5	7.2	29.5	10.5	1.3	100	
4 A.W.G. 25 mm ²	TL25-6	1/4 6.5	15.0	7.0	9.0	33.0	12.0	1.65	100	
	TL25-8	5/16 8.4	15.0	7.0	9.0	33.0	12.0	1.65	100	
	TL25-10	3/8 10.5	15.0	7.0	9.0	33.0	12.0	1.65	100	
2 A.W.G. 35 mm ²	TL35-6	1/4 6.5	15.2	8.2	10.6	38.0	14.2	2.5	100	
	TL35-8	5/16 8.4	15.2	8.2	10.6	38.0	14.2	2.5	100	
	TL35-10	3/8 10.5	15.2	8.2	10.6	38.0	14.2	2.5	100	
1/0 A.W.G. 50 mm ²	TL50-8	5/16 8.4	18.5	10.0	13.0	44.5	18.0	2.9	100	
	TL50-10	3/8 10.5	18.5	10.0	13.0	44.5	18.0	2.9	100	
	TL50-12	1/2 13.0	18.5	10.0	13.0	44.5	18.0	2.9	100	
2/0 A.W.G. 70 mm ²	TL70-10	3/8 10.5	21.4	11.5	15.0	54.2	20.4	3.5	100	
	TL70-12	1/2 13.0	21.4	11.5	15.0	54.2	20.4	3.5	100	

⊙ : Not UL and C-UL listed


Cực gắn dây dạng ống dẫn điện

NON-INSULATED COPPER TUBULAR LUGS (TL SERIES)

> Maximum electric current:

A.W.G.	3/0	4/0
AMP.	310	360

> Terminal material: COPPER

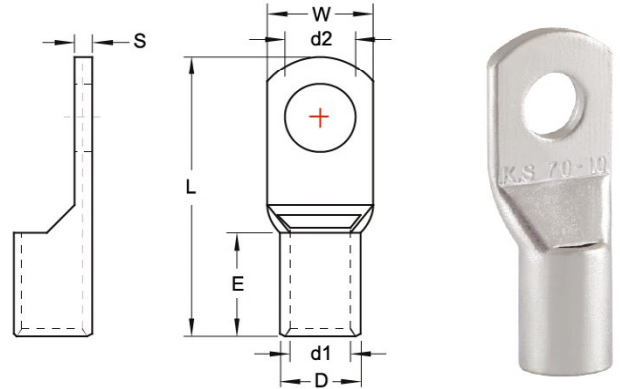

Wire Range A.W.G.	Item No.	Stud Size		Dimension						Packing
		d2	W	d1	D	L	E	S	pcs/bag	
3/0 A.W.G. 95 mm ²	TL95-10	3/8	10.5	25.5	13.5	17.4	59.0	23.4	3.9	100
	TL95-12	1/2	13.0	25.5	13.5	17.4	59.0	23.4	3.9	100
4/0 A.W.G. 120 mm ²	TL120-10	3/8	10.5	28.3	15.5	19.9	66.7	24.6	4.5	100
	TL120-12	1/2	13.0	28.3	15.5	19.9	66.7	24.6	4.5	100
	TL120-14	9/16	15.0	28.3	15.5	19.9	66.7	24.6	4.5	100
	TL120-16	5/8	17.0	28.3	15.5	19.9	66.7	24.6	4.5	100

Crimping Tools



KST2000D-1516
K.S.MODEL
with die index
No.: 10 / 16

KSTHX-150B
K.S.MODEL
with die index
No.: 25 / 35 / 50 / 70 / 95 / 120

HPM 400
NOVOPRESS MODEL
with die index
No.: 35 / 50 / 70 / 95 / 120